


Load Moment Indicators

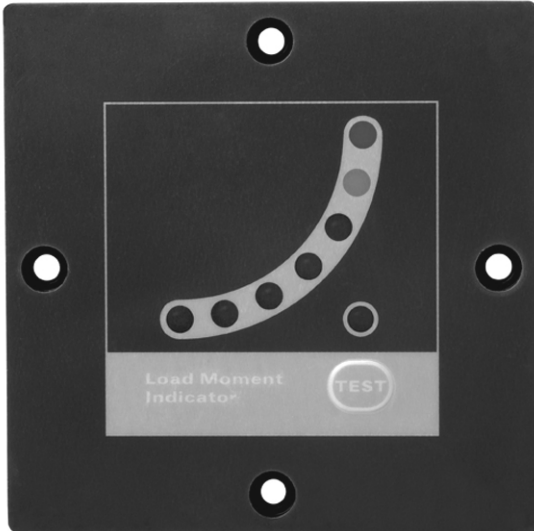

FEATURES

- Visual display provides continuous awareness of loading
- Proportional display of loading using 7 colored high intensity LED
- Dash mount
- Quickly and easily calibrated in the field
- Visual and audible warnings of over load
- Straight forward installation
- Fully automatic operation requiring no operator input
- Two dry contact for motion shut down and slow down
- A cost effective solution
- Digital strain gage sensor
- Environmental protection class: IP66
- Automatic self test at power on

OPTIONAL FEATURES

- Redundant sensors support
- Private label units
- Display enclosure according to customer requirements
- Operation definition according to customer definitions

DESCRIPTION

In conjunction with an extensometer or other type of strain gage based sensor, the LMI 521 Load Moment Indicator insures that the operator of telescopic loaders or other types of lifting equipment are continuously informed on the momentary machine load moment. An audible alarm warns that the machine has reached a maximum load moment condition. Two analog outputs are available as a slowdown output, used to trigger a slowdown of all machine functions that would lead to an increase in load moment. A second output is triggered at 100% of maximum load

moment and normally used to initiate a shutdown of all functions that would lead to an increase in load moment. Trigger level, audible and visible alarms may be tailored to customer specifications.

The LMI 521 compact design makes it suitable for those applications where space is limited.


APPLICATIONS

- Lifting machines
- Telescopic loaders

Load Moment Indicators

SPECIFICATIONS				
PARAMETER	MIN.	TYP.	MAX.	UNIT
Digital bus:				
Output type	LIN-Protocol Specification Rev 1.3, 2.0			
Maximum rating bus	-20		+30	V
(T ≤ 500ms)			40	V
Buzzer:				
Full open sound level at 30cm	76			db
Digital output (for shut-down and slow-down function):				
Output type	Relay output, normal contact, normal close			
Contact current (continuous, at 85°C			6	A
Power supply:				
Input voltage	9.5	12	18.5	VDC
Power consumption			6	W
Reverse power protection	-60			V
Protection from short	Power input short protect			
Environmental protection	IP66			

OUTLINE DIMENSIONS in millimeters

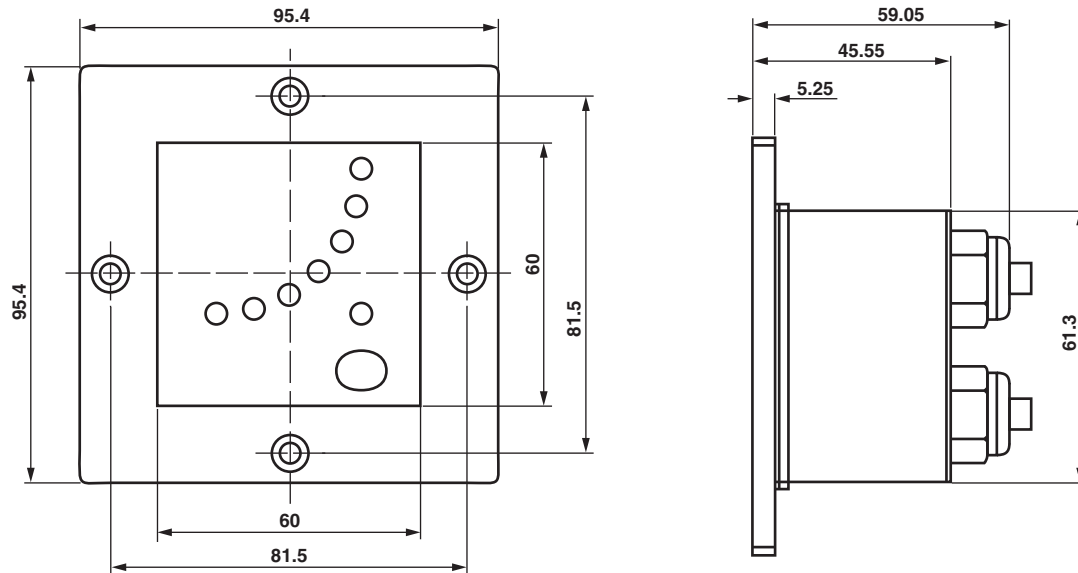

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay Precision Group"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay Precision Group disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay Precision Group's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay Precision Group.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay Precision Group products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay Precision Group for any damages arising or resulting from such use or sale. Please contact authorized Vishay Precision Group personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.