

## Remote Weight Display

### FEATURES

- Large 6 digit red LED display
- Digit height—57 mm (2-1/4")
- Digit-for-digit replication from the transmitting VPG Transducers indicator
- Communication interface—RS-232, RS-485, or 20 mA
- Baud rate and data format—DIP switch selectable
- Compatible with VT200/220/300/400 only
- Environmental protection to IP65
- **Optional**
  - UL/TUV/UK/China/Japan plug



### APPLICATIONS

- Truck scales/weighbridges
- Warehouse scales
- Loading bays
- All outdoor weighing applications


### DESCRIPTION

VPG Transducers' RD10 is a compact, digit-for-digit, high visibility remote display.

The large LED display (57mm digits) and wide viewing angle contribute to ease of reading at long distances. The VTRD10 is environmentally protected to IP65 and is suitable for outdoor use.

A standard serial interface (RS-232 or RS-485 or 20mA current loop) allows easy connection between the local indicator and the VTRD10 at distances up to 600 meters (RS-485). The VTRD10 is fully compatible with our Weight Indicator Models 200, 220, 300, and 400.

### CONFIGURATION

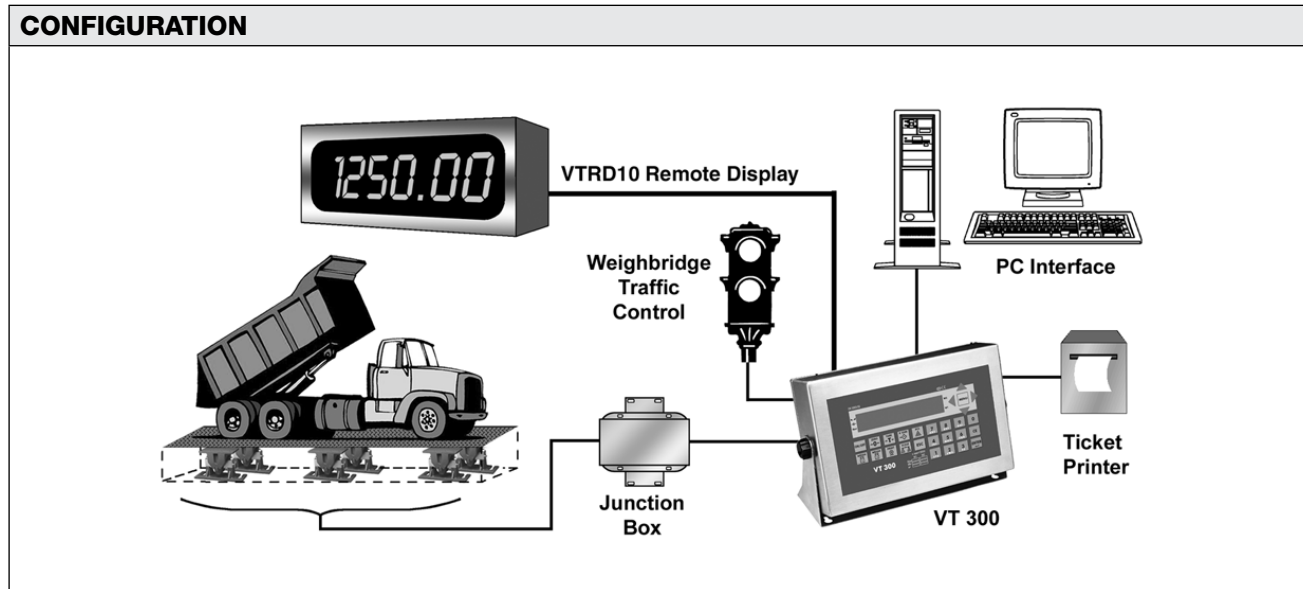

### Remote Weight Display

#### SPECIFICATIONS

##### DISPLAY AND SERIAL INTERFACE

**Display**

6 digits, LED, high visibility (57 mm, red)

**Serial Interface**

RS-232 or RS-485 or 20 mA current loop, terminated with screw type terminals

**Baud Rate**

DIP switch selectable 1200, 2400, 9600, 19200 baud

**Character Format**

DIP switch selectable

- a) 7 data bits, even parity, 1 stop bit
- b) 8 data bits, no parity, 1 stop bit
- c) 8 data bits, even parity, 1 stop bit

**Distance**

RS-232 and 20 mA current loop = 50 meters  
RS-485 = 600 meters

##### ENVIRONMENTAL

**Operating Temperature**

-10°C to +40°C (14°F to 104°F)

**Storage Temperature**

-20°C to +55°C (4°F to 158°F)

**Relative Humidity**

90% RH max., non-condensing

##### ELECTRICAL

**Voltage**

115/230 VAC +10%, 50–60Hz

**Power**

7W max.

##### ENCLOSURE—STAINLESS STEEL

**Dimensions**

328.3 x 72 x 40 mm L x H x D

**Protection**

IP65

**Wiring Connections**

Cable glands

##### CE APPROVAL

VPG Transducers is continually seeking to improve product quality and performance. Specifications may change accordingly.



## Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at [vpgsensors.com](http://vpgsensors.com).

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.